


INK AGITATOR

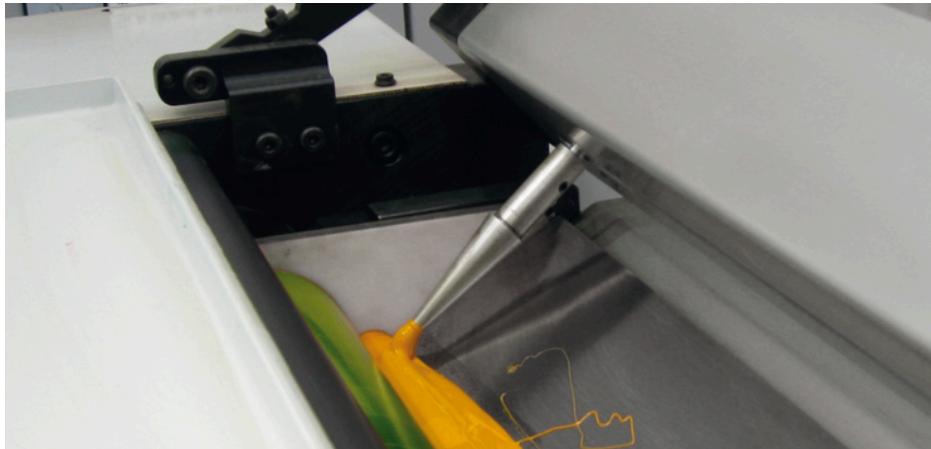

User friendly solution to avoid that the ink «stands still», especially with the use of high viscose UV-inks.

Optimal dispersion in the ink duct

The ink agitator helps to disperse the ink equally in the whole ink duct and moves the ink towards the duct roll.

Easy installation, even for retrofit

The ink agitator is available in different lengths and makes, type 1 with revolting finger, type 2 with static finger. Mounting parts are available for different machines.

Operation

The movement intervals are controlled by a programmable device and can be individually set to the different needs of any user. Switching on and off of individual agitators can be done through separate switches.

Technical data

Drive: pneumatic cylinder (max. 0.6 Mpa pressure)
Adjustable speed: min. 50mm/s, max. 200mm/s

Control device

Voltage: 24 VDC +20%/-15%
Entry current: 6.0 mA
Maximum power consumption: 7.5W

- + ink agitator with pneumatic drive
- + adjustable speed
- + simple fixation
- + easy retrofitting

The ink agitators are a perfect extension of our ink duct systems.

As a matter of course they also fit with ink ducts of other manufacturers.